


## DIMENSIONS:

# MECHLIFT 220

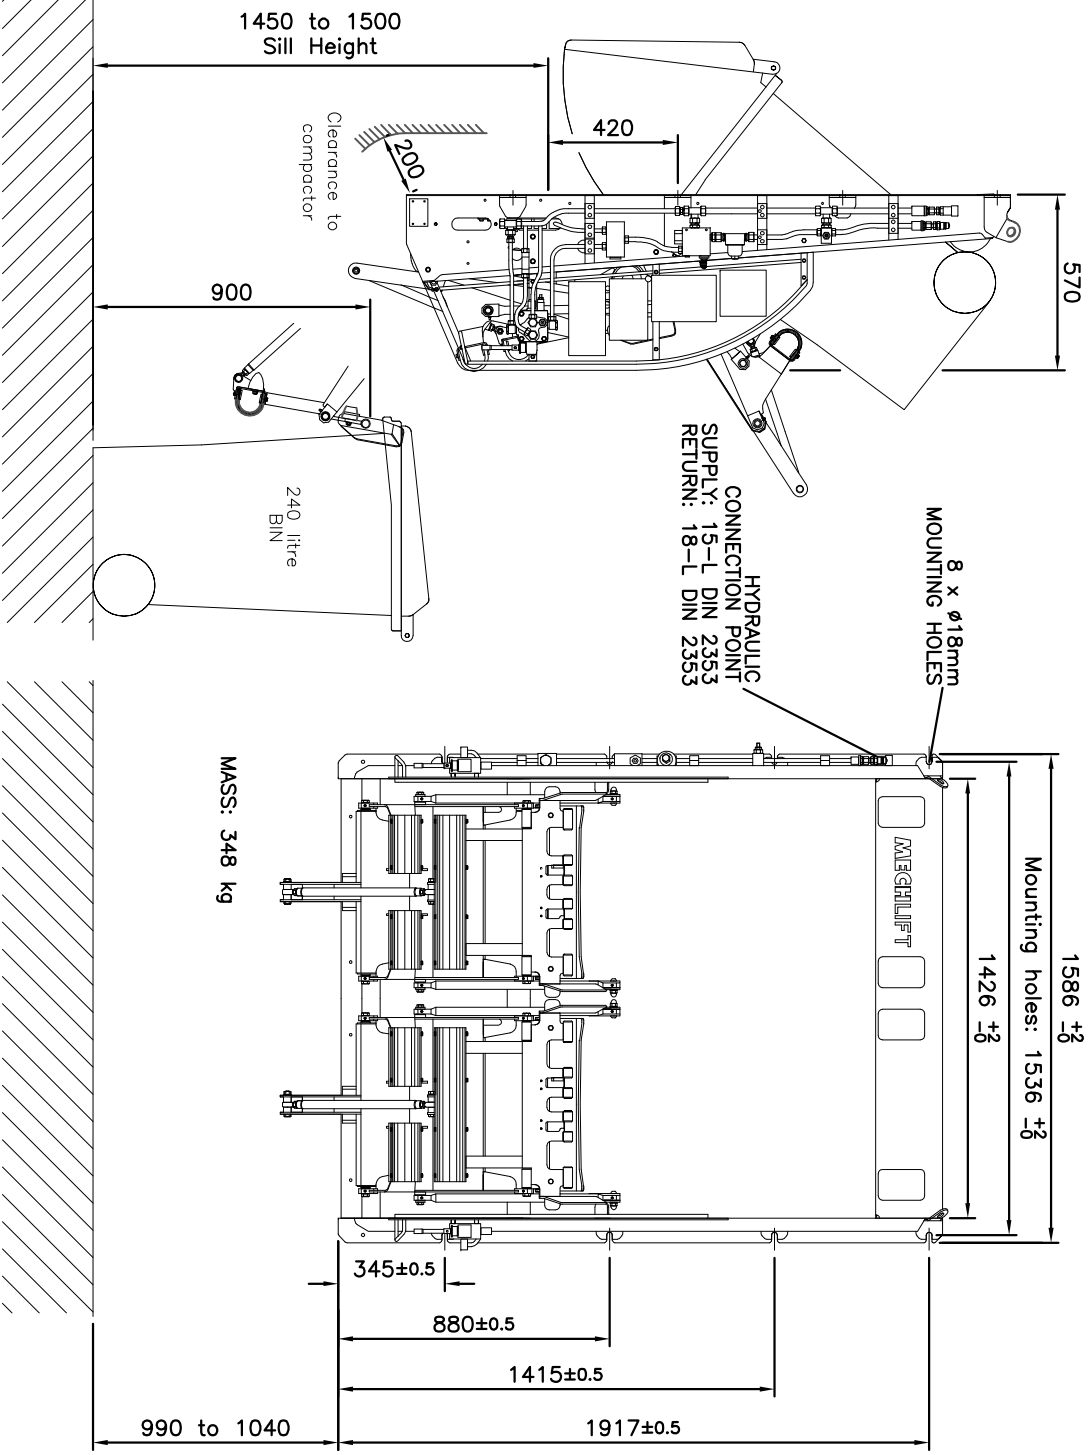

## SPECIFICATIONS:

BIN TYPE:	2 X 240 litre per lifter
CYCLE TIME:	7 – 8 seconds
TIPPING ANGLE:	55 degrees
LIFTING CAPACITY:	2 X 150 Kg (adjustable limit) (exceeds bin rating by 50%)
HYDRAULIC PRESSURE:	130 bar (relief valve set at 150 bar)
HYDRAULIC FLOW:	18 litre/min for 8 sec. cycle time
NOISE LEVEL:	< 72 dBA

## OPTIONS:

1. Electronic monitoring and counting of the lifts, etc.
2. Dual controls fitted to left hand side of the lifter.

## FEATURES:

The Model 220 has maintenance-free bearings, no flexible hoses (all zinc-plated steel pipes), no exposed cylinder rods which could be damaged or ingest dirt.

Damage in the event of accidents are inexpensive to repair because of this models very simple design, which also makes it easy to be maintained.